



500W Single Output with PFC Function

USP-500 series



■ Features :


- Universal AC input / Full range
- Built in active PFC circuit compliance to EN61000-3-2
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Free air convection for 400W and 500W with 23.5CFM forced air
- High power density 6.2w/in³
- AC input active surge current limiting
- U-bracket low profile:41mm
- Current sharing(1+1) for 24V and 48V models (Optional)
- Built-in remote ON-OFF control
- Built-in remote sense function
- Built in DC OK active signal
- 3 years warranty



SPECIFICATION

| MODEL | USP-500-5 | USP-500-12 | USP-500-15 | USP-500-24 | USP-500-48 | |
|-----------------------|--|--|--------------------------|--------------|--------------|--------------|
| OUTPUT | DC VOLTAGE | 5V | 12V | 15V | 24V | 48V |
| | RATED CURRENT | 80A | 42A | 33.5A | 21A | 10.5A |
| | CURRENT RANGE (convection) | 0 ~ 60A | 0 ~ 33A | 0 ~ 27A | 0 ~ 17A | 0 ~ 8.5A |
| | CURRENT RANGE (23.5CFM FAN) | 0 ~ 80A | 0 ~ 42A | 0 ~ 33.5A | 0 ~ 21A | 0 ~ 10.5A |
| | RATED POWER (convection) | 300W | 396W | 405W | 408W | 408W |
| | RATED POWER (23.5CFM FAN) | 400W | 504W | 502.5W | 504W | 504W |
| | RIPPLE & NOISE (max.) Note.2 | 80mVp-p | 100mVp-p | 100mVp-p | 150mVp-p | 150mVp-p |
| | VOLTAGE ADJ. RANGE | 4.5 ~ 5.5V | 10.8 ~ 13.2V | 13.5 ~ 16.5V | 21.6 ~ 27V | 43.2 ~ 52.8V |
| | VOLTAGE TOLERANCE Note.3 | ±2.0% | ±2.0% | ±2.0% | ±2.0% | ±2.0% |
| | LINE REGULATION | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% |
| | LOAD REGULATION | ±2.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% |
| | SETUP, RISE TIME | 1500ms, 80ms/230VAC 3100ms, 80ms/115VAC at full load | | | | |
| HOLD UP TIME (Typ.) | 20ms/230VAC 20ms/115VAC at full load | | | | | |
| INPUT | VOLTAGE RANGE Note.5 | 90 ~ 264VAC 127 ~ 370VDC | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | |
| | POWER FACTOR (Typ.) | 0.95/230VAC | 0.98/115VAC at full load | | | |
| | EFFICIENCY (Typ.) | 85% | 90% | 90% | 89% | 90% |
| | AC CURRENT (Typ.) | 6A/115VAC | 2.6A/230VAC | | | |
| | INRUSH CURRENT (Typ.) | 30A/115VAC | 50A/230VAC | | | |
| | LEAKAGE CURRENT | <2mA / 240VAC | | | | |
| PROTECTION | OVERLOAD | 105 ~ 130% rated output power Protection type : Constant current limiting, unit will shut down after 3 sec. ,re-power on to recover | | | | |
| | OVER VOLTAGE | 5.7 ~ 7V | 13.5 ~ 16V | 17 ~ 21V | 27.8 ~ 32.4V | 53 ~ 64.8V |
| | OVER TEMPERATURE | 85°C ±5°C (TSW1 : detect on heatsink of o/p diode) | | | | |
| | | 95°C ±5°C (5V),100°C (12V,15V,24V,48V) (TSW2 : detect on heatsink of power transistor) Protection type : Shut down o/p voltage with auto-recovery | | | | |
| FUNCTION | REMOTE ON/OFF CONTROL | RC+/RC-: 0~0.8V power on ; 4~10V power off | | | | |
| | DC-OK SIGNAL | PSU turn on : 3.3V ~ 5.6V ; PSU turn off: 0 ~ 1V | | | | |
| ENVIRONMENT | WORKING TEMP. | -20 ~ +70°C (Refer to "Derating Curve") | | | | |
| | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +85°C, 10 ~ 95% RH | | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0 ~ 50°C) | | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes | | | | |
| SAFETY & EMC (Note 4) | SAFETY STANDARDS | UL60950-1, TUV EN60950-1 approved | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC | | | | |
| | ISOLATION RESISTANCE | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH | | | | |
| | EMC EMISSION | Compliance to EN55022 (CISPR22) Class B, EN61000-3-2,-3 | | | | |
| | EMC IMMUNITY | Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN61000-6-2, heavy industry level, criteria A | | | | |
| OTHERS | MTBF | 129.8K hrs min. MIL-HDBK-217F (25°C) | | | | |
| | DIMENSION | 254*127*41mm (L*W*H) | | | | |
| | PACKING | 1.6Kg; 6pcs/10.6Kg/0.7CUFT | | | | |
| NOTE | <ol style="list-style-type: none"> 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 5. Derating may be needed under low input voltages. Please check the derating curve for more details. | | | | | |

Mechanical Specification

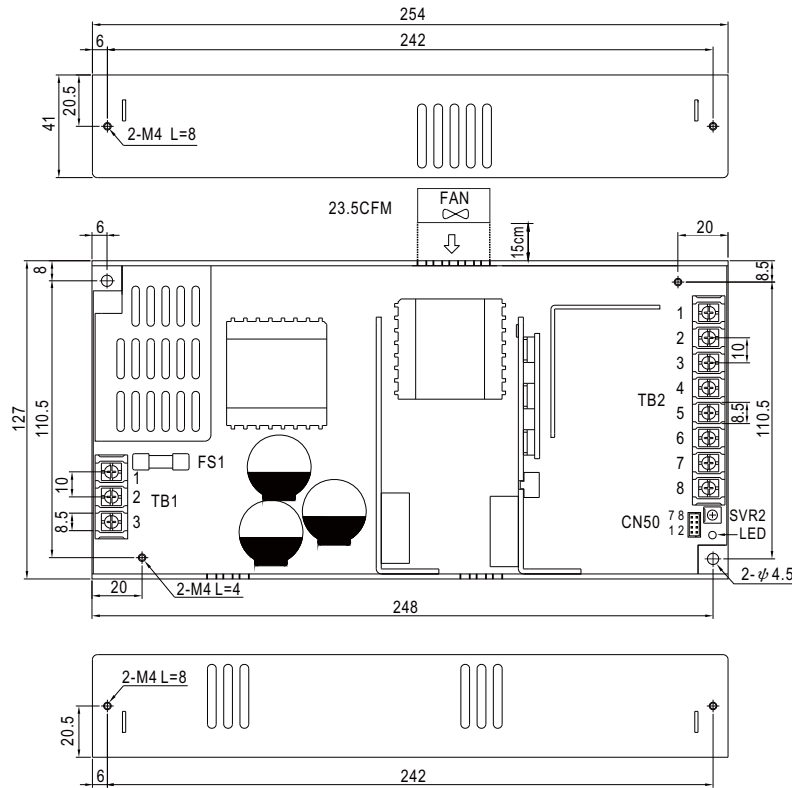

AC Input Terminal Pin No. Assignment

| Pin No. | Assignment |
|---------|------------|
| 1 | AC/L |
| 2 | AC/N |
| 3 | FG \perp |


DC Output Terminal Pin No. Assignment

| Pin No. | Assignment |
|---------|--------------|
| 1~4 | DC OUTPUT -V |
| 5~8 | DC OUTPUT +V |


Connector Pin No. Assignment (CN50) : JST B8B-PHDS or equivalent

| Pin No. | Assignment | Mating Housing | Terminal |
|---------|--------------|----------------------------|----------------------------------|
| 1 | CS(Optional) | JST PHD-08VS or equivalent | JST SPHD-002T-P0.5 or equivalent |
| 2,8 | -S | | |
| 3 | RC- | | |
| 4 | RC+ | | |
| 5 | GND | | |
| 6 | DC-OK | | |
| 7 | +S | | |


Block Diagram

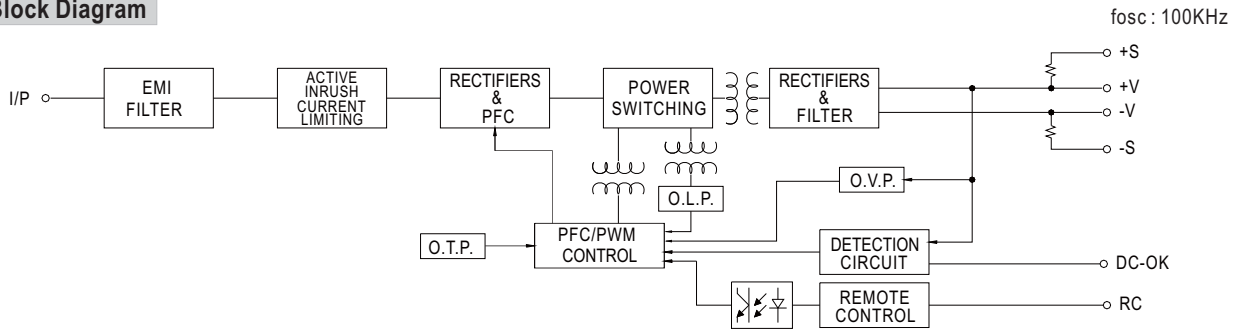

Derating Curve

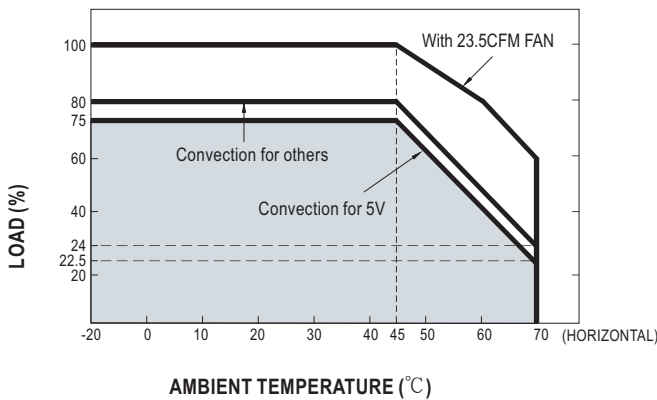

Static Characteristics

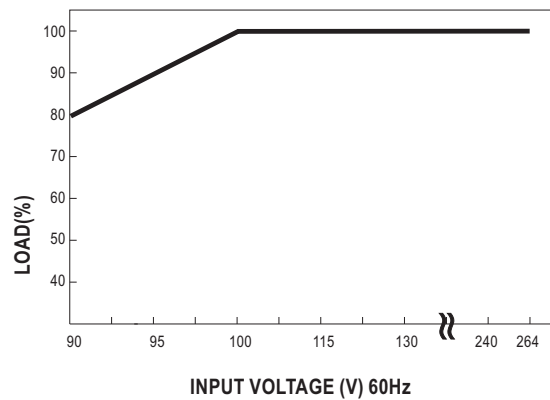

■ Function Description of CN50

| Pin No. | Function | Description |
|---------|---------------|---|
| 1 | CS (Optional) | Current sharing signal. When units are connected in parallel, the CS pins of the units must be connected to allow current balance between units. |
| 2,8 | -S | Negative sensing. The -S signal should be connected to the negative terminal of the load. The -S and +S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.5V. |
| 3 | RC- | Return for RC+ signal input. |
| 4 | RC+ | Turns the output on and off by electrical or dry contact between pin 4 (RC+) and pin 3 (RC-). 0~0.8V: Power ON, 4~10V: Power OFF. |
| 5 | GND | This pin connects to the negative terminal (-V). Return for DC_OK signal output. |
| 6 | DC-OK | DC-OK signal is a TTL level signal, referenced to pin6(DC-OK GND). High when PSU turns on. |
| 7 | +S | Positive sensing. The +S signal should be connected to the positive terminal of the load. The +S and -S leads should be twisted in pair to minimize noise pick-up effect. The maximum line drop compensation is 0.5V. |

■ Function Manual

1.Remote Control

The PSU can be turned ON/OFF by using the "Remote Control" function.

| Between RC+(pin4) and RC-(pin3) | Output Status |
|---------------------------------|---------------|
| SW OFF (0 ~ 0.8V) | ON |
| SW ON (4 ~ 10V) | OFF |

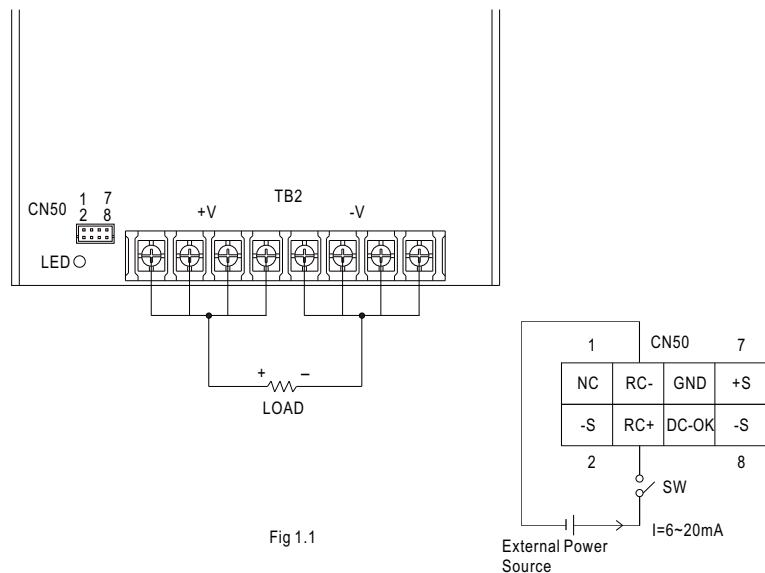


Fig 1.1

2.DC-OK Signal

DC-OK signal is a TTL level signal. High when PSU turns on.

| Between DC-OK(pin6) and GND(pin5) | Output Status |
|-----------------------------------|---------------|
| 3.3 ~ 5.6V | ON |
| 0 ~ 1V | OFF |

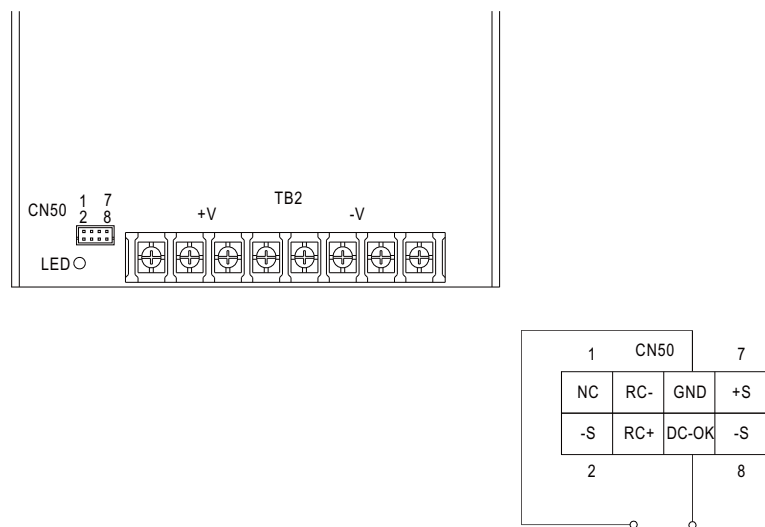


Fig 2.1

3. Remote Sense

The remote sensing compensates voltage drop on the load wiring up to 0.5V.

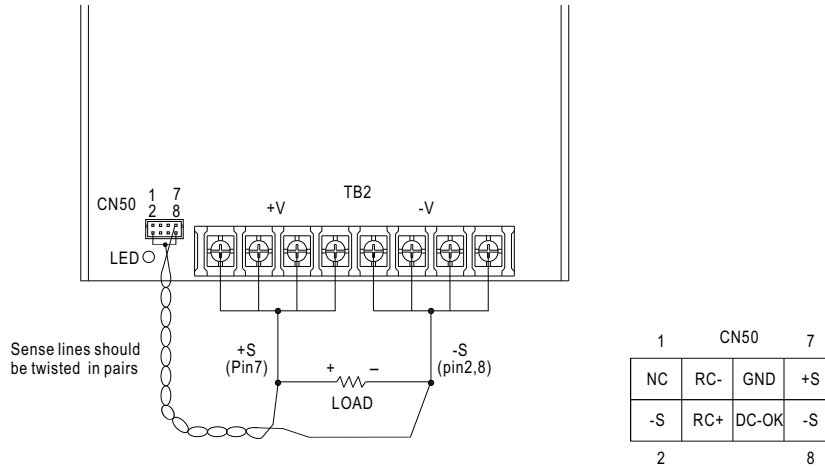


Fig 3.1

4. Current Sharing with Remote Sensing (Optional for 24V & 48V)

USP-500 has the built-in active current sharing function and can be connected in parallel to provide higher output power :

- (1) Parallel operation is available by connecting the units shown as below.
(+S,-S,CS and GND are connected mutually in parallel).
- (2) Difference of output voltages among parallel units should be less than 2%.
- (3) The total output current must not exceed the value determined by the following equation.
(output current at parallel operation)=(Rated current per unit) × (Number of unit) × 0.9
- (4) In parallel operation 2 units is the maximum, please consult the manufacturer for applications of more connecting in parallel.
- (5) The power supplies should be paralleled using short and large diameter wiring and then connected to the load.

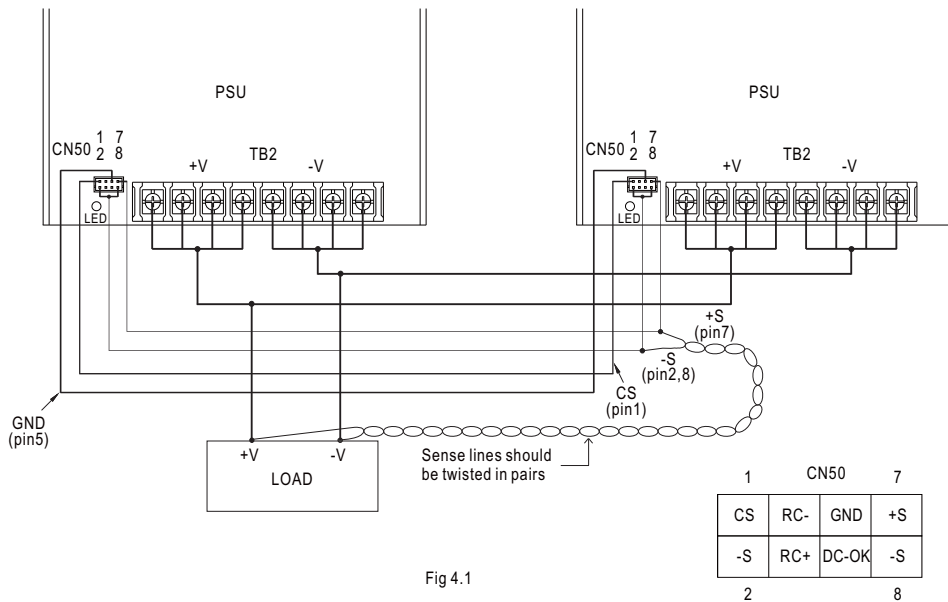


Fig 4.1

Note : 1. In parallel connection, maybe only one unit (master) operate if the total output load is less than 2% of rated load condition.
The other PSU (slave) may go into standby mode and its output LED and relay will not turn on.
2.2% min. of dummy load is required.