



■ Features :

- Protections: Short circuit/Over load /Over voltage/Polarity
- Cooling by free air convection
- 100% full load burn-in test
- Low cost
- High reliability
- 2 year warranty




SPECIFICATION

MODEL		PSD-15A-05	PSD-15B-05	PSD-15C-05	PSD-15A-12	PSD-15B-12	PSD-15C-12	PSD-15A-24	PSD-15B-24	PSD-15C-24	
OUTPUT	DC VOLTAGE	5V			12V			24V			
	RATED CURRENT	3A			1.25A			0.6A			
	CURRENT RANGE	0 ~ 3A			0 ~ 1.25A			0 ~ 0.6A			
	RATED POWER	15W			15W			14.4W			
	RIPPLE & NOISE (max.) Note.2	50mVp-p			100mVp-p			100mVp-p			
	VOLTAGE TOLERANCE Note.3	±2.0%			±2.0%			±2.0%			
	LINE REGULATION	±1.0%			±1.0%			±0.5%			
	LOAD REGULATION	±1.0%			±1.0%			±0.5%			
SETUP, RISE, HOLD UP TIME	2.5s, 25ms, ---/12VDC/24VDC/48VDC at full load										
INPUT	VOLTAGE RANGE	A: 9.2 ~ 18VDC (12VDC) B: 18 ~ 36VDC (24VDC) C: 36 ~ 72VDC (48VDC)									
	EFFICIENCY(Typ.)	74%	78%	78%	67%	78%	78%	72%	78%	79%	
	DC CURRENT(Typ.)	1.9A/12VDC 0.9A/24VDC 0.45A/48VDC									
PROTECTION	OVER LOAD	105% ~ 150% rated output power Protection type : hiccup mode ,recovery automatically after fault condition is removed									
	OVER VOLTAGE	5.75 ~ 6.75V			13.8~ 16.2V			27.6 ~ 32.4V			
ENVIRONMENT	WORKING TEMP.	-10 ~ +60°C (Refer to "Derating Curve")									
	WORKING HUMIDITY	20 ~ 95% RH non-condensing									
	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.05%/°C (0 ~ 50°C)									
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, Period for 60min.each along X, Y, Z axes									
SAFETY & EMC (Note 4)	WITHSTAND VOLTAGE	I/P-O/P:2.0KVAC									
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms/500VDC / 25°C/ 70% RH									
	EMI CONDUCTION&RADIATION	Compliance to EN55032(CISPR32) CLASS B									
	EMS IMMUNITY	Compliance to EN61000-4-2, 3, 4, 6, 8 EN55024, EN61000-6-1, light industry level, criteria A									
OTHERS	MTBF	740.4Khrs min. MIL-HDBK-217F (25°C)									
	DIMENSION	94*49*25mm (L*W*H)									
	PACKING	81g;120pcs/10.72Kg									
NOTE	<p>1.All parameters NOT specially mentioned are measured at normal input,rated load and 25°C of ambient temperature.</p> <p>2.Ripple & noise are measured at 20 MHz of bandwidth by using a 12inch twisted pair-wire terminated with a 0.1uf & 47uf capacitor.</p> <p>3.Tolerance:includes set up tolerance,line regulation and load regulation.</p> <p>4.The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 230mm*230mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</p>										

Mechanical Specification

Unit:mm

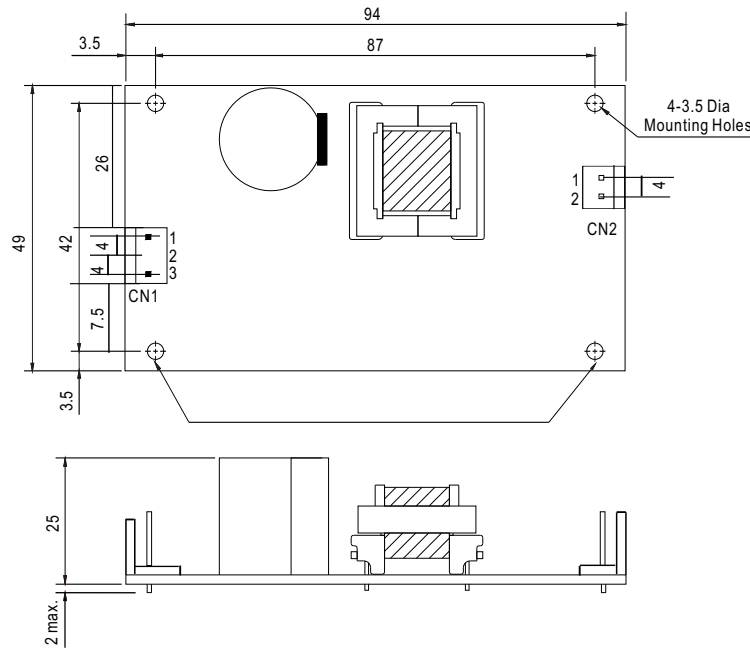

DC Input Connector (CN1) : JST B3P-VH or equivalent


Pin No.	Assignment	Mating Housing	Terminal
1	-V	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
2	No Pin		
3	+V		

DC Output Connector (CN2) : JST B2P-VH or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	-V	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
2	+V		

Block Diagram

fosc : 100KHz

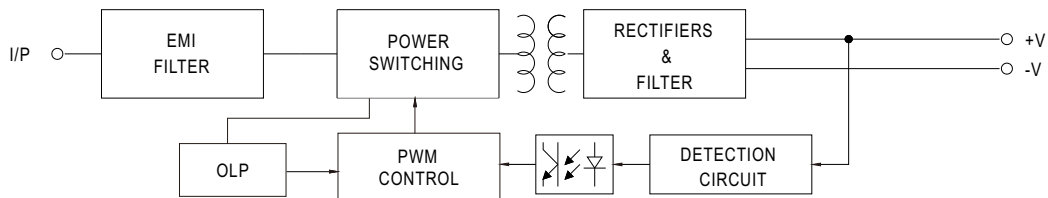

Output Derating

